




## IRIDIUM

### 1621 MHz BAND PASS Filter

P/N MSS-08-1621-12S

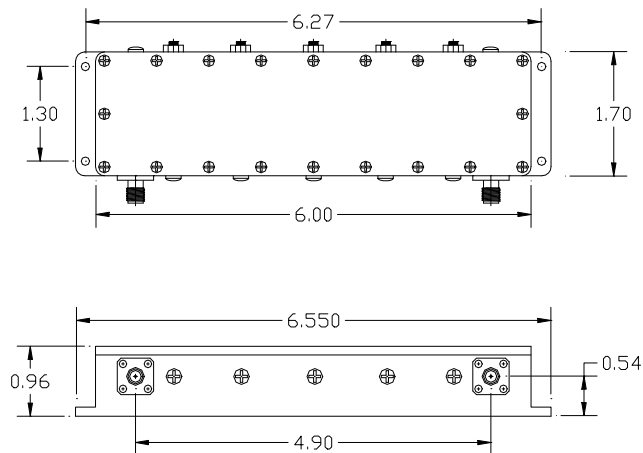

### *Specification*

<i>Parameter</i>	<i>Units</i>	<i>Minimum</i>	<i>Typical</i>	<i>Maximum</i>
Center Frequency	MHz	-	1621	-
Signal Bandwidth (1 dB BW)	MHz	12	-	-
50 dB Stop-Band	MHz	+/- 30	-	-
70 dB Stop-Band	MHz	+/-50		
Insertion Loss @ fc	dB	-	1.1	1.5
Return loss, input, output	dB	14 min.	16	-
Impedance, input, output	ohms	-	50	-
Operating temperature range	°C		-30 to +85	
Connectors	-	SMA-F		
Mounting Holes	-	0.115		
Size	inch	6.55 x 1.70 x 0.96		

1 Chestnut Street, Nashua, N.H. 03060 Phone: 603.889.3601 / Fax 603.882.5156

[www.mssna.com](http://www.mssna.com) / e-mail: sales@mssna.com